



PROPOSED INSTALLATION OF FLEXIBLE MEMBRANE

DETAIL "A"

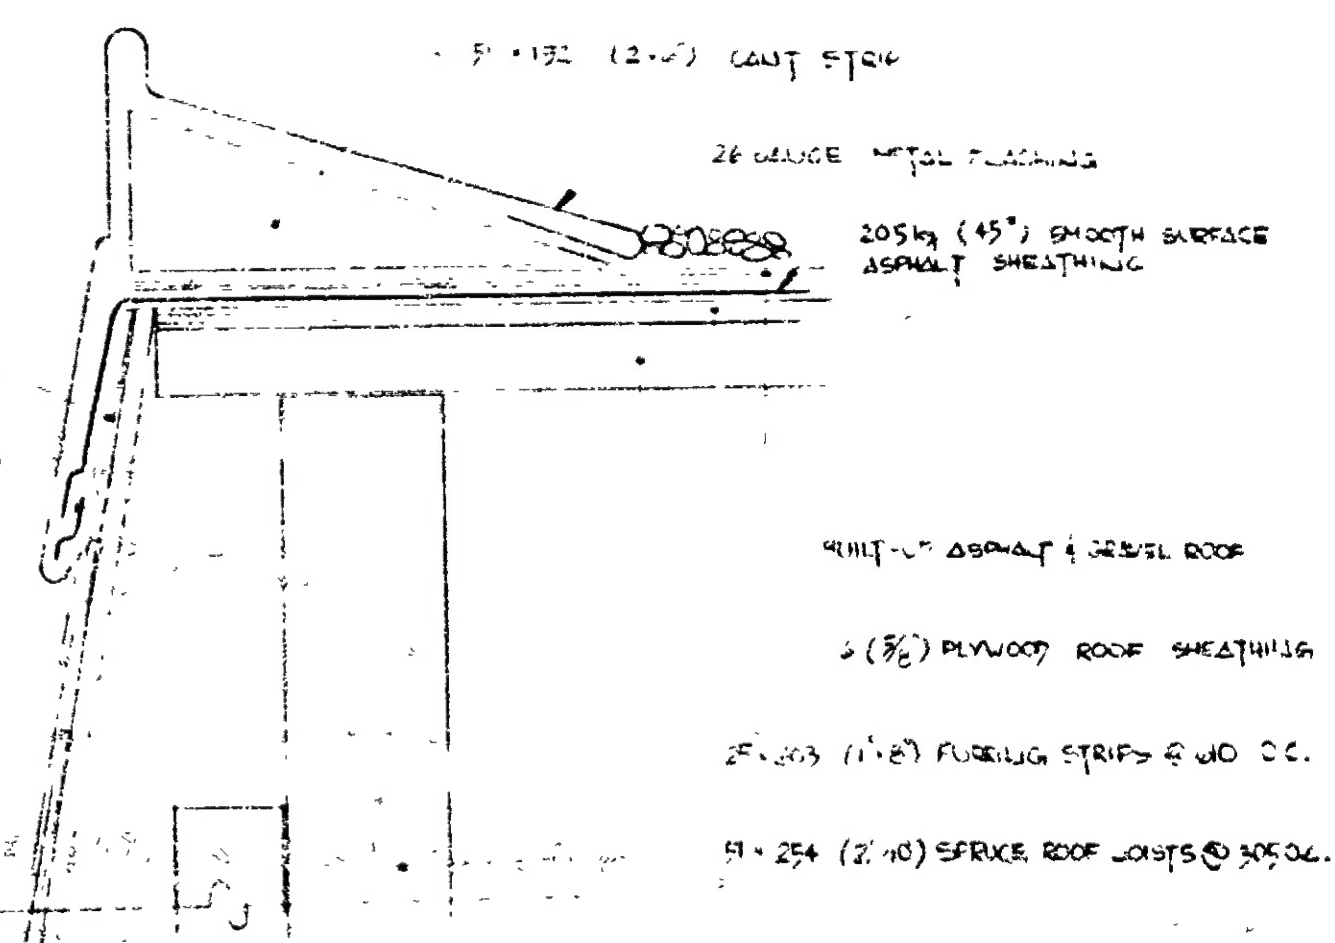

EXISTING DETAIL

- Notes
1. Remove existing Metal Flashing from Perimeter of Roof.
 2. Scrape off existing gravel for 610mm (2') around Perimeter of Roof.
 3. Install Lexsaco F.R. 40 914mm (3") wide as per detail "A" and manufacturer's directions.
 4. Install new prefinished 26 gauge Metal Flashing on Perimeter Cants as per detail "A".
 5. Re-install gravel in hot membrane around Perimeter of Roof.

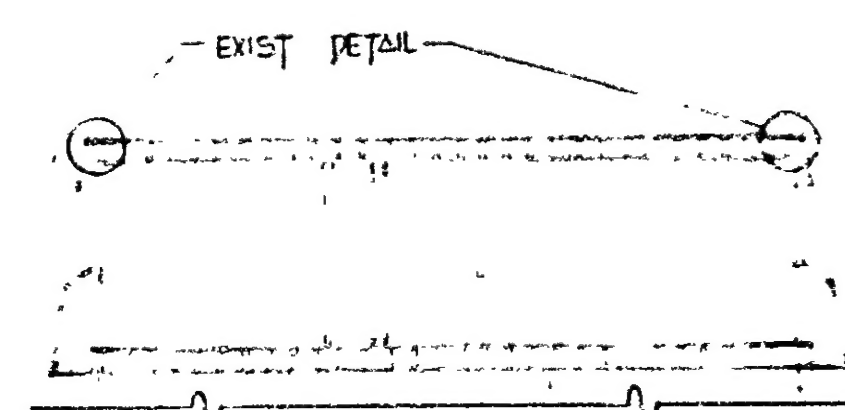

SECTION THROUGH ROOF - TYP

DIMENSIONS SHOWN WITHOUT DECIMAL POINT ARE IN MILLIMETERS, UNLESS OTHERWISE INDICATED
 DIMENSIONS SHOWN WITH DECIMAL POINT ARE IN METERS

ONTARIO HOUSING CORPORATION				
MAINTENANCE ENGINEERING BRANCH 101 BLOOR STREET WEST TORONTO M7A 2P9 ONTARIO				
Title ROOF REPAIR		Project Address 30 ALEXANDER AVE., PETERBOROUGH		
Scale U.T.S.	Checked By F.B.S.	Project # OH-9	Drawing # 78-348-B	
Drawn By [Signature]	Date FEB. '78			

- M3108-R01 -